

he Oliver 4705 Shaper uses an interchangeable quill assembly capable of handling 3/4" or 1-1/4" spindles. With a 4" spindle travel and cutter diameters up to 8" no job is out of the question. A newly designed dovetail system for the spindle height adjustment ensures


both accuracy and longevity with minimal maintenance. With the skilled woodworker in mind, Oliver put a lot of thought into its fence design. With accurately scaled micro-adjusts for the right and left fences and integral feather board hold downs the operator is sure to be pleased.

CALL: 1-800-559-5065 To find a dealer near you!



4705

SHAPER

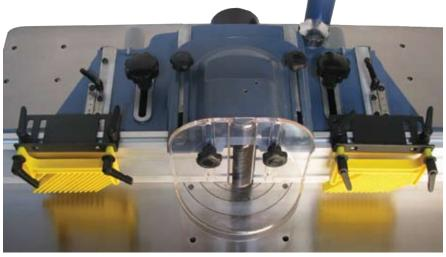


WITH THE SKILLED WOODWORKER in mind, Oliver's fully adjustable fence with built in feather boards makes comprehensive work a breeze!





ERGONOMIC CONTROL PANEL includes a digital readout with settable reference point for spindle height.

Model	4705
Stock No. (5HP, 1Ph)	4705.001
Stock No. (7.5HP, 3Ph)	4705.002
Table Dimensions	39" x 31-1/2"
Table Height	36-1/2"
Vertical Spindle Travel	4"
Spindle Direction	Reversible
Spindle Speed (RPM)	5,000, 7,000, 10,000
Maximum Tool Diameter	7" Below Table, 8" above table
Spindle Diameter	1-1/4" and 3/4" Interchangable
Dust Collector Port Diameter	4"
Minimum CFM Required	800
Motor	5HP, 1Ph, 220V only or 7.5HP, 3Ph, 220/440V, Prewired 220V
Machine Dimensions (L x W x H/in.)	39" x 31" x 45"
Gross Weight	870 lbs.



THE THREE INCLUDED TABLE inserts allow for various cutter diameters.

